

UDTT ECO-ENERGY - 65/80 TUMBLE DRYERS



TOUCH II

User friendly and totally programmable 7" touchscreen control.
Program time-of-day promotions and discounts automatically.
Works with any external payment system.
USB Connection and PC software free of charge for programming, traceability, data analysis. Videos on display (ads, instructions, etc.)
37 languages.



OUTSTANDING FEATURES

SFEX - Integrated Fire Extinguishing System
SOFT DRY - Extra-smooth drum perforations.
COOL DOWN - anti-wrinkle at the end of the cycle
Stainless steel drum.
Reversing drum action.
Frequency inverter.



EFFICIENCY

EFFICIENT DRY - Intelligent humidity control. With new drum inlet temperature control.
AIR RE-CYCLE - Efficient air recirculation system
THERMAL INSULATION - Complete air-flow circuit
Double door glass
FULL FLOW - New 'optimized' system of mixed airflow
Big stainless-steel lint filter



VERSATILITY

Make to order - customization.
WET CLEANING ready.
OPL <--> COIN - Standard OPL model that can be easily changed to vended laundry.



CONNECTIVITY

IoT Domus Connect. Remote access.



ERGONOMICS

Accessible lint filter.
Large diameter doors.
Door opening direction adjustable on site.



MAINTENANCE

Hinged panel to access control board.
Easy and ergonomic access for service.
Technical menu: statistics, alarm, auto test, data recovery.



OTHERS

Easy-to-clean, skin-plate outer casing with stainless-steel look.
CE and ETL approved.




OPTIONS

- DomusConnect communication kit
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Wooden packing
- Reverse door opening
- Exhaust silencer Ø 8"
- Rear panel external air + filter
- Ship voltage for electric models: 440V III 50/60 Hz No N

TECHNICAL DATA	UNIT.	UDTT- 65 ECO ENERGY		UDTT- 80 ECO ENERGY	
CAPACITY					
Capacity 1/18	lb	70		80	
Capacity 1/20	lb	60		75	
Hourly Output *	lb/h	134.7		161.6	
Evaporation capacity *	l/h	30.9		32.1	
DRUM					
Ø Drum	in	37.25		37.25	
Ø Door	in	31.50		31.50	
Door center height	in	41		41	
Door bottom height	in	64.50		64.50	
Drum length	in	30.75		36.85	
Drum volume	cu ft	19		23	
POWER					
Drum motor power	HP	0.75		0.75	
Fan motor power	HP	1		1	
Electric heating power	Kw	Not Available		Not Available	
Total electric power (elec.model)	Kw	Not Available		Not Available	
Gas heating power	BTU	140,000		140,000	
Total electric power (gas model)	Kw	1.35		1.35	
Steam heating power (elec.model)	Kw	Not Available		Not Available	
Steam heating power (gas model)	Kw	1.15		1.15	
CONNECTIONS		ELECTRICAL	GAS	ELECTRICAL	GAS
120 V / 60 Hz / 1	FLA	-	30 A	-	30 A
208-240 V / 50-60 Hz / 1	FLA	Not Available	-	Not Available	-
208-240 V / 50-60 Hz / 3	FLA	Not Available	-	Not Available	-
Ø Gas inlet	in	-	0.50	-	0.50
Ø Steam inlet	BSP	1"		1"	
Ø Condensed (Steam models)	BSP	1"		1"	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	in	38.75 / 42		38.75 / 42	
Net Depth / Gross Depth	in	41.50 / 45.50		47.60 / 51.60	
Net Height / Gross Height	in	76.60 / 82		76.60 / 82	
Height without heating battery	in	-		-	
Net weight / Gross weight	lb	507 / 573		573 / 628	
OTHERS					
Max airflow	CFM	883		883	
Ø Duct Size	in	8		8	
Sound level	dB	65		65	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

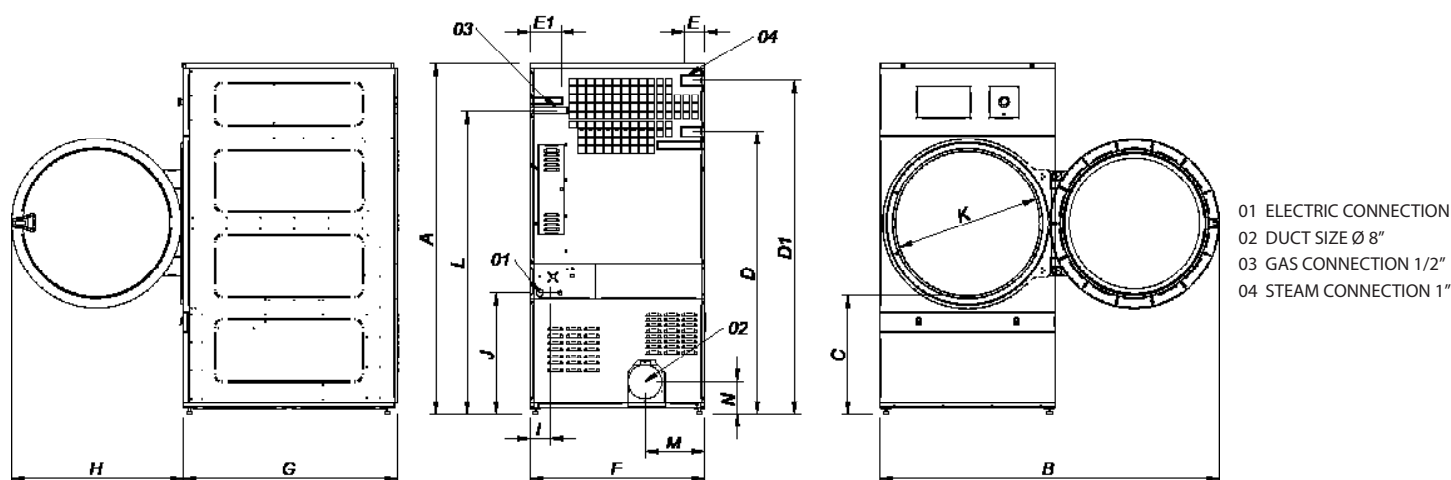

		A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N
UDTT-65 ECO ENERGY	in	76.60	75	25	62.60	74	4.50	6.85	38.75	41.50	37.75	4.30	26.75	31.60	67.25	13.35	7
UDTT-80 ECO ENERGY	in	76.60	75	25	62.60	74	4.50	6.85	38.75	47.60	37.75	4.30	26.75	31.60	67.25	13.35	7